Link-Belt® WORK TOOLS
LDT Series

APPLICATIONS:

- Concrete Recycling
- Structural Steel
- C & D Processing
- Demolition
- Bridge Demolition
- Rebar
- Wire
- Copper
- Aluminum

Link-Belt EXCAVATORS

Three Models Sized to Match Link-Belt 210 Through 490 Machines

1. Low-cost, reversible, long-life crushing teeth are quickly and easily replaced, eliminating build-up
2. 4-way indexable cutting blades feature an apex that draws material deeper into the jaw for more efficient cutting
3. Easy-to-change crushing teeth are available in several configurations to maximize performance in any application
4. Lighter weight ensures stable mounting on today's excavators and specialty high-reach machines
5. Short, flat-top head with bolt-on bracket shortens the center of gravity while making it easy to change mounting for different carriers
6. Open lower jaw allows material being processed to easily pass through, preventing jamming
7. Cylinder is reverse-mounted to protect from debris

Model	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Wt. Stick Mount***
LDT 250	4,900 lbs. 2,223 kg	31 in. 787 mm	33 in. 838 mm	8 ft. 0 in. 2.4 m	45,000 lbs. 20 MT
LDT 350	7,000 lbs. 3,175 kg	39 in. 991 mm	42 in. 1,067 mm	9 ft. 2 in. 2.8 m	66,000 lbs. 30 MT
LDT 490	10,000 lbs. 4,536 kg	46 in. 1,168 mm	45 in. 1,143 mm	10 ft. 6 in. 3.2 m	90,000 lbs. 41 MT

**Weight includes mounting bracket to attach to excavator.*
***Distance is measured from the attachment mounting pivot (stick) forward.*
****Available third-member configuration only.*

All LDT tools are covered by a 1-year, 1,800-hour (whichever occurs first) Standard Limited Warranty; warranty will be honored on tools mounted on Link-Belt excavators only.

Link-Belt® WORK TOOLS
Dimensions & Weights

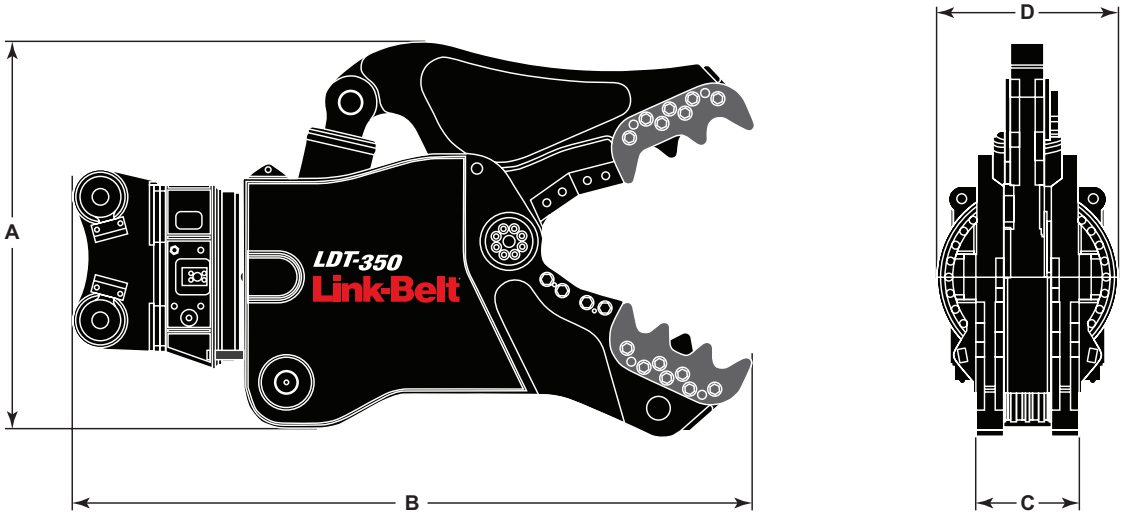

Attachment	Weight	A	B	C	D
LDT 250	4,900 lbs. 2 223 kg.	56″ 1 422 mm	100″ 2 540 mm	17″ 432 mm	28.25″ 718 mm
LDT 350	7,000 lbs. 3 175 kg.	66″ 1 676 mm	116″ 2 946 mm	18″ 457 mm	31.25″ 794 mm
LDT 490	10,000 lbs. 4 536 kg.	74″ 1 880 mm	131″ 3 327 mm	21″ 533 mm	38″ 965 mm

9/18 #LBX2385 LBX® and Link-Belt® are registered trademarks. Copyright 2018. All rights reserved. We are constantly improving our products and therefore reserve the right to change designs & specifications.