Link-Belt
EARTHMOVING • FORESTRY
MATERIAL HANDLING EQUIPMENT

800LX

Operating Weight:
Standard Excavator: 174,600 lbs (79 200 kg)
Mass Excavator: 174,600 lbs (79 200 kg)
SAE Net Horsepower: 444 HP (331 kW)
Bucket Range: 2.47 - 5.91 cu. yd. (1.89 - 4.52 cu. m.)

LBX Company LLC

Designed for Durability and Performance...

Smarter. Faster. Better.

Inte-LX™ or ***Intelligent LX*** is the most advanced technology to date. Inte-LX™ maximizes the balance between speed, power, and fuel efficiency. *Page 4*

First Electronic Engine Control in an Excavator

This results in increased responsiveness to the job requirements; faster cycle times, increased fuel efficiency, cleaner and quieter. *Page 6*

Reduced Maintenance and Extended Component Life

The Nephron® Filtration system means less wear and tear on the hydraulic components, reducing hydraulic system breakdowns and maintenance costs. *Page 8*

Faster Cycle Times

A smarter more efficient hydraulic system uses dual pump flow, auto power swing and regenerative circuits for increased productivity. *Page 5*

Anti-Theft System

To protect your investment, a password protected anti-theft system comes as standard equipment and can be activated at the users choice. *Page 4*

Superior Serviceability

On-board diagnostics with memory and fewer hydraulic oil changes result in superior serviceability. *Page 8*

Exceptional Travel Performance

High torque travel motors automatically shift to provide increased tractive effort when operating in difficult ground conditions. *Page 7*

Maximized Operator Comfort

The industry's largest cab providing low noise, climate controlled heat and air conditioning, standard. *Page 3*

Auto Power-Up

Auto power-up automatically increases system pressure by 9% to power through tough ground or when lifting a heavy load. *Page 4*

Cleaner Side-Wall Cuts

With Auto Power-Swing, Inte-LX™ automatically prioritizes swing torque when simultaneously working the swing and attachment. *Page 5*

Low Ground Pressure and Exceptional Stability

LC undercarriage for low ground pressure and stability incorporates heavy-duty excavator style components. *Page 7*

Long Life Pin and Bushing Design

Chrome pins and grease impregnated bushings throughout the complete attachment hold up to torsional stresses created in these large excavators and reduces the greasing interval. *Page 7*

Heavy Duty Boom and Arm

Built to handle powerful breakout forces, strong lifting capacities and the stresses of allied attachments. *Page 7*

Operator's Control Station

Large, Low Noise Cab Design

A wide cab design provides expanded leg and elbow room. **Six silicon filled isolation mounts** float the entire cab above the noise and vibration of an already quiet machine greatly reducing operator fatigue. Large entry door and access width makes entering and exiting the cab a breeze.

Control Panel

Many machine function switches are concentrated in a panel in clear view and easy reach of the operator.

Tilting Console and Sliding Seat

The seat slides independently of the control consoles to assure optimal joystick positions at all times.

The joysticks can be tilted to any of three settings, allowing the operator to work in the most comfortable position. The entire platform can then be moved forward or backward for best foot pedal positioning.

Panoramic Visibility

This cab provides more window space than ever. Even the sunroof is large. The Operator's "office with a view" has rear and side windows made of LEXAN® MARGUARD™. Standard vandal covers protect the safety glass front windows and stow on top when you're working.

Informative LCD Monitor

Large size LCD Monitor displays graphically a wide range of operating information such as; engine temperature, hydraulic oil temperature, fuel level, travel speed, work mode and engine idle. Additional messages include system / machine warnings and service due messages in your choice of English and 13 other languages. Backlit illumination ensures displays are always readable – day and night.

All Weather Visibility

With built-in washer and intermittent speed control, the wiper keeps your windshield clear, whatever the condition outside. The "rise-up" design takes the wiper arm and blade out of the line of sight when its not in use, plus lifts the blade from the cab surface so that it doesn't freeze to the cab in icy weather.

Fresh Air Induction-Type Climate Control

LX provides exceptional heating / cooling capabilities with a climate control system that automatically regulates the temperature for the operator's comfort. Now with 6 vents, LX Series excavators provide exceptional air circulation for optimum operator comfort. Front-side air outlet and defroster ensure a comfortable operating environment while the open / close type rear window further improves the ventilation.

Best Seat at the Site

The KAB 515 seat adjusts to your size and comfort. The semi-bucket seat provides firm support and comfort with armrests, adjustable seat suspension, adjustable lumbar support, and durable urethane cushions.

Tripmeter

In addition to the hour meter, LX has added a Tripmeter. Every job or application can be measured.

AM / FM Stereo Radio

Standard equipment.

Emergency Escape Window

Allows operator to escape from the rear window in case of emergency.

Inte-LX™

Inte-LX™, the intelligent computer command control system monitors hydraulic output, pressures, and regulates engine performance for the maximum balance between speed, power and fuel efficiency needed to handle the job.

Auto Power-Up

The LX series can quickly respond to changes in operating conditions, automatically supplying a power increase, without operator interaction and regardless of the work mode. Hydraulic pressure sensors detect resistance and pressure is increased by 9% for 8 seconds. Auto Power-Up stays on 100% of the time in the "L" mode.

Anti-Theft Device

Your Link-Belt distributor can set up your Inte-LX™ control system to include a password protection feature that requires the password to start and run the machine.

One-Touch and Auto Idle Control

When user-preset time has elapsed after leaving the control handles in the neutral position, auto-idling automatically drops the engine to idle speed (900 rpm). Or, you can choose to use the one-touch idling switch, located at the top of the right controller so that you are always in control.

Operating Modes

The LX series enables the operator to have a choice on how the machine is operated. Simply choose the work mode that matches the machines output to the job application. Five operating modes are available.

A: Auto-Mode

The most revolutionary approach to maximizing power & fuel efficiency available today. Just select the Auto-Mode with the switch panel. Using actual working pressure readings, Inte-LX™ instantly changes modes assuring the best combination of speed and power while you can stay focused on the work at hand.

H: Heavy Mode

For heavy excavation or whenever you need extra power and maximum speed.

S: Standard Mode

For standard digging and loading operations reducing fuel consumption.

L: Lift Mode

For lifting and other operations that need fingertip accuracy.

Allied Attachment Work Mode

Automatically adjusts engine speed and pump output to match additional attachments such as hammers. The engine rpm's are presettable to match the hydraulic requirements.

On-Board Diagnostics

An on-board diagnostic system allows service personnel to quickly analyze up to 148 items in four categories;

- Machine Status: The diagnostic system provides a detailed view of pump pressure, engine rpm, water temperature, oil temperature, fuel temperature, throttle setting and ongoing operating functions such as auto power-up and auto-mode.
- Troubleshooting: Service personnel can trace electrical faults such as sensor failures and harness damage.
- History: An on-going record of machine faults is stored in the computer including the hour meter reading at time of the fault to assist in the diagnostics procedure.
- Systems Configuration: Service personnel can change machine operating characteristics such as; time delay for auto-idle, language selection, and engine rpm preset for allied attachment mode.

Performance

Advanced Hydraulic System

Top-of-the-Class Cycle Times / Fuel Efficient

The LX Series hydraulic system efficiently delivers power, speed and control when and where it's needed. Fuel consumption and cycle times are more efficient in swing / dump operations over conventional models. This is accomplished through reducing system pressure loss, re-using return oil and providing double pump flow during key operations.

Regeneration System

By re-using the returning oil from the arm and the boom, ground excavating operation speed is increased.

Two Hydraulic Return Lines

Two hydraulic returns lines mean faster speed in the system, and reduces back pressure build-up.

2 Speed Boom and Arm

The 2-speed boom lifting and arm opening and closing function provides the LX series with top-of-its-class lifting speed especially in swing / excavating simultaneous operations such as truck loading.

Auto Power-Swing

This patent pending design incorporates a selector valve that helps maintain attachment and hydraulic flow to achieve excellent swing and digging forces in side wall-cut operations. In normal digging when side pressure is not needed, LX sends all the flow to the attachment always insuring the best performance for either operation.

Cushioned Swing

This built-in special cushion valve greatly reduces the shock and vibration at the end of each swing cycle.

Cushioned Attachment Control

In addition to having cushioned cylinders, selectable cushioned attachment control lets you smooth out the attachment movements. A cushion valve in the boom and arm circuits reduce shock loading and vibration during attachment operation.

Free Swing

Allows the operator to disengage the swing brake providing crane-like precision and control when handling loads.

Single Pedal Travel

Allows the operator to engage both tracks at the same time using only one pedal. This keeps the machine in line with the ditch and provides safety and ease in loading / unloading the machine for transport.

Automatic Speed Shifting

When operating in difficult travel conditions, the travel motor automatically downshifts from high to low speed for increased tractive effort and then automatically returns to high speed when travel conditions permit.

Fuel Tank Capacity

The LX Series fuel tank provides the capacity to reduce refueling frequency, allowing for an extended work day.

Dependable Isuzu Power

First In Class

The 800 LX is the first excavator in it's class to utilize an electronic engine control function. By optimizing the level of fuel injection to match the load, this responsive new system assures more efficient use of fuel, plus by keeping the engine closer to the target engine speed, less lugging takes place so cycle times are faster, exhaust noise, vibration, and smoke are reduced making the environment in the cab and around the machine cleaner and quieter.

Electronic Engine Control (EEC)

Inte-LX™ maintains engine rpm's when load demands change. Engines equipped with mechanical governors spike rpm's up-and-down when operating loads increase and decrease. This phenomena causes engines to consume extra fuel and be louder.

Tier II Compliant

LX engines meet EPA Tier II standards requirements.

Idle Start

At start-up, the engine defaults to idle regardless of throttle position. This prevents over revving a cold engine, helping to extend its service life.

Low Idle Up

When low temperatures or other conditions reduce engine rpm to a point that alternator output won't keep the battery charged, Inte-LX™ automatically increases the idle speed from 900 to 1100 rpm keeping the batteries fully charged.

Auto Engine Warm-Up

If the engine temperature is low following start-up, the auto warm-up system will operate automatically and continue with engine speed increasing gradually until normal engine operating temperatures are reached.

Air Filtration

LX Series engines are equipped with a dual element air filter with an evacuator cup and restriction indicator for ease of maintenance.

Larger Muffler

The LX series features a larger muffler which absorbs more sound and makes this the quietest Link-Belt yet.

Emergency Engine Shutdown

In emergency situations, the engine can be shut down with the push of a switch located on the control panel in the cab. This switch must be re-engaged prior to restarting the engine.

Engine Product Support

Isuzu North America offers 24-hour access to their full line of engine parts through 2 regional distribution centers, 27 Master Distributors and 690 Authorized Service Dealers.

Advantages of EEC

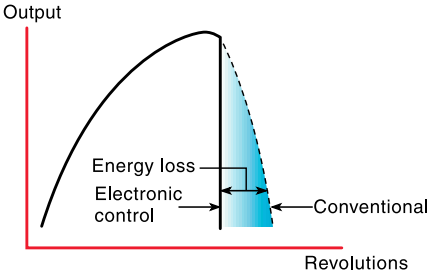

Maintaining engine revolution at a fixed rate regardless of the load prevents the energy loss that occurs when shifting cycle times to accommodate higher or lower loads.

Low Fuel Consumption

The electronic governor responds to changes in operating loads quicker than a mechanical governor. As a result, EEC regulates the amount of fuel injection accurately and quickly.

Lower, Cleaner Emissions

Low fuel consumption results in high ignition efficiency (cleaner emission) and low emissions.

Low Sound Levels

At high idle, EEC can control engine speed rpm at rated horsepower. This means the engine doesn't overrun, resulting in lower sound levels.

Low Vibration

EEC causes engine rpm to be stable, resulting in low vibration.

Upper and Attachments

Powerful Breakout Forces

Deep and wide box sections of high yield steel and deep groove welding hold up to high breakout forces, strong lifting capacities and the stresses of **allied attachments** such as hammers, thumbs, compactors, shears, grapples and crushers.

Strength and Durability

LX heavy duty booms and arms have internal baffles which provide better strength and durability to withstand torsional loads.

Easy Maintenance System

Chrome plated pins mounted in grease impregnated brass bushings ***on complete attachment*** make a durable and long

lasting connection. This also makes it possible to extend the lubrication interval on this type of pin to once every 6 months or 1,000 hours of operation, whichever comes first.

A. The surface of the bushing is stratified with a solid lubricant in hard brass to protect the parts from abrasion.

B. The pin's surface is plate-processed to increase hardness and protect from abrasion

C. The original dust seal is double-structured to keep out dust and dirt and protect from subsequent abrasion.

Three Arm Choices (standard excavator) and a wide variety of buckets provide the reach and breakout forces for optimum productivity.

Mass Excavator attachment is also available.

Undercarriage

LC Undercarriage

Long undercarriages incorporate heavy duty excavator style components and improve both stability and ground bearing pressure. The 800 LX is designed with expandable / retractable side frames for ease of transport. High torque compact final drives keep you going up steep grades and through deep mud.

Bearing Tub

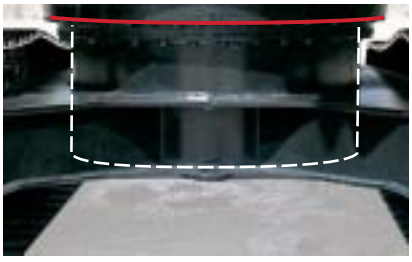

Built into the carbody is the turntable bearing "tub" which extends down through the top plate and is welded to the bottom of the carbody as well as the top for increased strength and durability.

Two-Speed Travel Motor

Offers smooth shifting and the needed pull when going up grades and making turns.

Strut Type Chain Links

There are no weak links in our chain. Struts reduce twisting and hold up to severe point loading when all of the machine weight is transferred through one roller. Track pins are greased and sealed for long life.

Track Rollers

Filled with synthetic oil to reduce heat build up and for long term reliability.

Track Adjustment

Adjustments are made easy with standard grease cylinder track adjusters and shock absorbing springs.

Side Frames

Side frames expand / retract : use in expanded position only to dig, retracted position to transport.

Reliability / Serviceability

Nephron® Filtration Extends the Service Life of the Hydraulic System

The Nephron® Filtration System eliminates contaminants of 1 micron or more in size. This significantly reduces hydraulic system breakdown and maintenance costs under normal usage. Less wear and tear on the hydraulic components means more years of reliable performance.

Nephron® Filter Advantages

1. Problems associated with hydraulic system contamination are substantially reduced. Machine down time and costs for repairing are saved as a consequence.
2. The interval of hydraulic oil replacement is extended to every 5000 hours.
3. The wear of hydraulic components is reduced, which lengthens the service life of the machine.

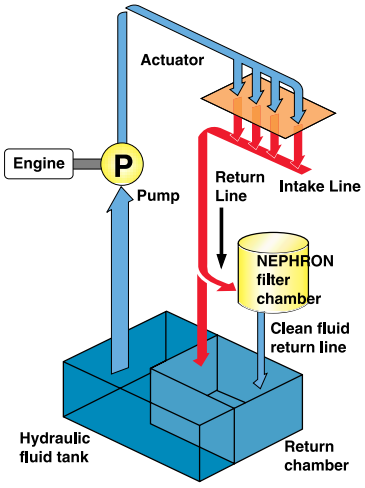

Inte-LX™ On-Board Diagnostics

Inte-LX™ monitors, stores, and displays information about the electrical and hydraulic systems such as; the current machine conditions, diagnostic warnings, history, and machine default settings. Information stored in Inte-LX™ can also be downloaded to your personal computer using standard connectors .

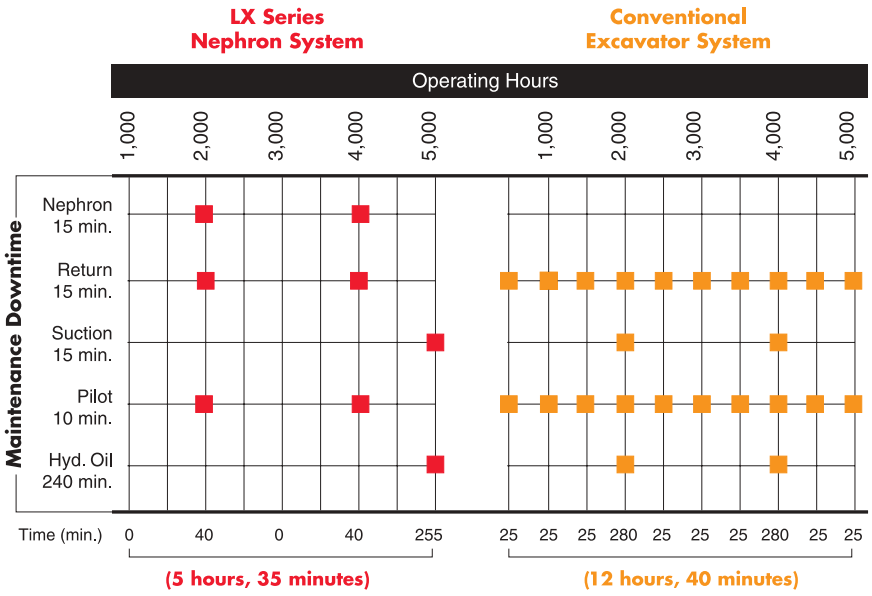

This chart shows the LX machine with the Nephron® filter vs. most other excavators. As you can see hydraulic fluid changes are reduced from every 2,000 hours to every 5,000 hours. Also, 22 filter changes on a typical excavator is reduced to 7 filter changes. All of this results in lower labor, downtime, and maintenance costs.

Large wide opening access doors

These doors make it easy to get to all routine maintenance locations.

Hydraulic Fittings

"O" ring seals are used as hydraulic connectors to assure tighter seals.

Air Conditioner Air Intake Filter

This filter lets in fresh clean air and is mounted on the outside of the cab, enabling easy cleaning and replacement.

Sealed Automotive Style Wiring Harness

These harnesses are sealed to eliminate dirt and moisture that can cause a circuit to short out. Wiring is also color and number coded to make trouble shooting faster and easier.

Exceptional Customer / Product Support

Your investment in the Link-Belt LX Series Excavator is always protected. LBX Distribution is located from coast to coast; you're never far from quality service professionals. "Level Two" support takes the form of experienced factory service advisors, on-call at a moment's notice. And to expedite parts, LBX utilizes the proven parts system LINK-NET…an on-line, around the clock parts distribution solution. You can be assured that we have the parts when you need them.

Specifications

Engine

Isuzu BB-6WG1XQB Electric engine control, water cooled, 4-cycle diesel, 6 cylinder, turbocharged with air cooled intercooler, 957 CID (15 682 cc), 5.79" (147 mm) bore x 6.06" (154 mm) stroke. EPA Tier II compliant.

SAE net horsepower .. 444 HP (331 kW) @ 1,800 rpm
Max. torque ..... 1,410 ft-lbs. (1,912 N-m) @ 1,500 rpm
Starter ..... Electric, 24V
Alternator ..... 90 amp
Battery Cold Cranking ..... 1,146 amps
Air cleaner ..... Double element
Governor ..... Electronic
Fuel Usage*
Heavy - ..... 18.5 gph (70.0 l/hr)
Average - ..... 15.4 gph (58.3 l/hr)
Light - ..... 12.3 gph (46.6 l/hr)

*Fuel economy varies widely depending upon application.

The "Heavy" category represents nearly continuous operation in tough digging applications. The "Light" category represents applications that utilize the machine about 50% of the time, in easier digging.

Hydraulic System

Two variable displacement axial piston pumps and one gear pump for pilot controls, with Link-Belt Inte-LX™ Control System. Link-Belt Inte-LX™ Control includes: electric engine control, five selectable working modes, automatic power-up, auto/one touch idling, automatic speed shifting, free swing, cushioned attachment, swing anti-braking system, and two safety lockout switches including gate lock.

Hydraulic Pumps
Two variable volume piston pumps provide power for attachment, swing and travel.

Maximum flow ..... 2 x 132.1 gpm (2 x 500 l/min)
Pilot pump max. flow ..... 7.1 gpm (27 l/min)

Relief Valve Settings
Boom/arm/bucket ..... 4,550 psi (320 kg/cm²)
in Power-Up Mode ..... 4,970 psi (350 kg/cm²)
Swing circuit ..... 4,050 psi (285 kg/cm²)
Travel ..... 4,970 psi (350 kg/cm²)

Hydraulic Cylinders – number of cylinders – bore x rod x stroke.

Boom ..... 2 – 7.9" x 5.5" x 74.5"
(200 mm x 140 mm x 1 893 mm)
Arm ..... 1 – 8.5" x 5.9" x 85.6"
(215 mm x 150 mm x 2 175 mm)
Excavator Bucket ..... 1 – 7.5" x 5.1" x 61.2"
(190 mm x 130 mm x 1 555 mm)

Oil Filtration

Nephron® filter ..... 1 micron
Return, pilot ..... 10 micron
Suction filter ..... 105 micron

Control Valve One 4-spool valve and one 5-spool valve with auxiliary spool.

Cab and Controls

Cab mounted on 6 fluid filled mountings. Features include a safety glass front window and LEXAN® MARGARD™ rear and side windows, reclining/sliding suspension seat with headrest, armrests, lumbar support, heater, air conditioner, AM/FM stereo, cigarette lighter, pop-up skylight window, and intermittent wiper with washer. Front window slides upward for storage and the lower front window is removable. Control levers are located in 3-position tilting control consoles. Reliable soft-touch switches. Easy-to-read illuminated LCD service monitor keeps operator in touch with critical machine functions.

Heater output ..... 20,240 BTU/hr (5 100 kcal/hr)
A/C output ..... 18,250 BTU/hr (4 600 kcal/hr)
Noise level (inside cab) ..... 79 dB(A)
Noise level (exterior) ..... 110 dB(A)

Swing

Planetary reduction powered by axial piston motor. Internal ring gear with grease cavity for swing pinion. Swing bearing is single-row shear type ball bearing. Swing cushion valve and dual stage relief valves for smooth swing deceleration and stops. Mechanical disc swing brake. Auto power swing.

Swing speed ..... 0 – 7.6 rpm
Tail swing ..... 13' 5" (4.10 m)
Swing torque ..... 177,750 ft.-lbs. (24 580 kgf-m)

Undercarriage

Carbody is integrally welded for strength and durability. LC undercarriage side frames are expandable and retractable, equipped with grease cylinder track adjusters and shock absorbing springs, sealed track, lubricated rollers and idlers. Two-bar grouser track shoes.

Carrier rollers ..... 3 per side
Track rollers ..... 9 per side
Track link pitch ..... 10.3" (260 mm)
Shoes ..... 51 per side
Shoe width ..... 29.5" (750 mm)
Ground pressure
w/29.5" (750 mm) shoes ..... 13.00 psi (.96 kg/cm²)
w/35.5" (900 mm) shoes ..... 11.33 psi (.80 kg/cm²)
w/43.3" (1 100 mm) shoes ..... 9.27 psi (.65 kg/cm²)

Travel System

Two-speed independent hydrostatic travel with compact axial piston motors for increased performance. Hydraulic motor powered output shaft coupled to a planetary reduction unit and track sprocket. All hydraulic components mounted within the width of side frame.

Automatic Downshift: When operating in difficult travel conditions, the travel motor automatically downshifts from high to low speed for increased tractive effort and then automatically returns to high speed when travel conditions permit.

Max. travel speed ..... 1.8/2.7 mph (2.9/4.3 km/h)
Traction force ..... 122,300 lbs. (55 465 kgf)
Gradeability 70%

Spring applied, hydraulically released disc parking brake built into each motor. Each travel motor equipped with counterbalance valve to prevent overspeeding down an incline and 3-stage reliefs for smooth starts and stops.

Lubricant and Coolant Capacity

Hydraulic tank ..... 82 gal. (310 liters)
Hydraulic system ..... 190 gal. (720 liters)
Final drive (per side) ..... 3.6 gal. (13.5 liters)
Swing drive ..... 3.6 gal. (13.5 liters)
Engine ..... 12.4 gal. (47 liters)
Fuel tank ..... 238 gal. (900 liters)
Cooling system ..... 26.4 gal. (100 liters)

Attachment

Boom (Standard excavator) ..... 27' 7" (8.4 m)

Available Arms	**Digging Force***
• 12' 0" (3.66 m)	61,600 lbs. (27 940 kgf)
in Auto Power-Up Mode ..	67,440 lbs. (30 590 kgf)
• 14' 7" (4.44 m)	52,160 lbs. (23 660 kgf)
in Auto Power-Up Mode .	56,880 lbs. (25 800 kgf)
• 18' 5" (5.62 m)	45,410 lbs. (20 598 kgf)
in Auto Power-Up Mode ..	49,680 lbs. (22 534 kgf)

Boom (Mass excavator) ..... 23' 9" (7.25 m)

Available Arms	**Digging Force***
• 9' 9" (2.98 m) (Mass)	71,260 lbs. (32 320 kgf)
in Auto Power-Up Mode .	78,010 lbs. (35 380 kgf)

Standard Excavator
Bucket Digging Force ..... 74,190 lbs. (33 650 kgf)
in Auto Power-Up Mode ..... 81,160 lbs. (36 810 kgf)

Mass Excavator
Bucket Digging Force ..... 96,670 lbs. (43 850 kgf)
in Auto Power-Up Mode ... 105,660 lbs. (47 930 kgf)

*Digging force ratings are based on ISO 6015, "Earthmoving Machinery – Hydraulic Excavators – Tool Forces".

Operating Weight

Standard Excavator - Working weight with 29.5" (750 mm) shoes, 27' 7" (8.40 m) boom, 12' 0" (3.66 m) arm, 6,610 lb. (3 000 kg) bucket and 27,560 lbs. (12 500 kg) counterweight .... 174,600 lbs. (79 200 kg)

Mass Excavator - Working weight with 29.5" (750 mm) shoes, 23' 9" (7.25 m) boom, 9' 9" (2.98 m) arm, 7,630 lb. (3 460 kg) bucket and 27,560 lbs. (12 500 kg) counterweight .... 174,600 lbs. (79 200 kg)

Specifications (continued)

Working Ranges

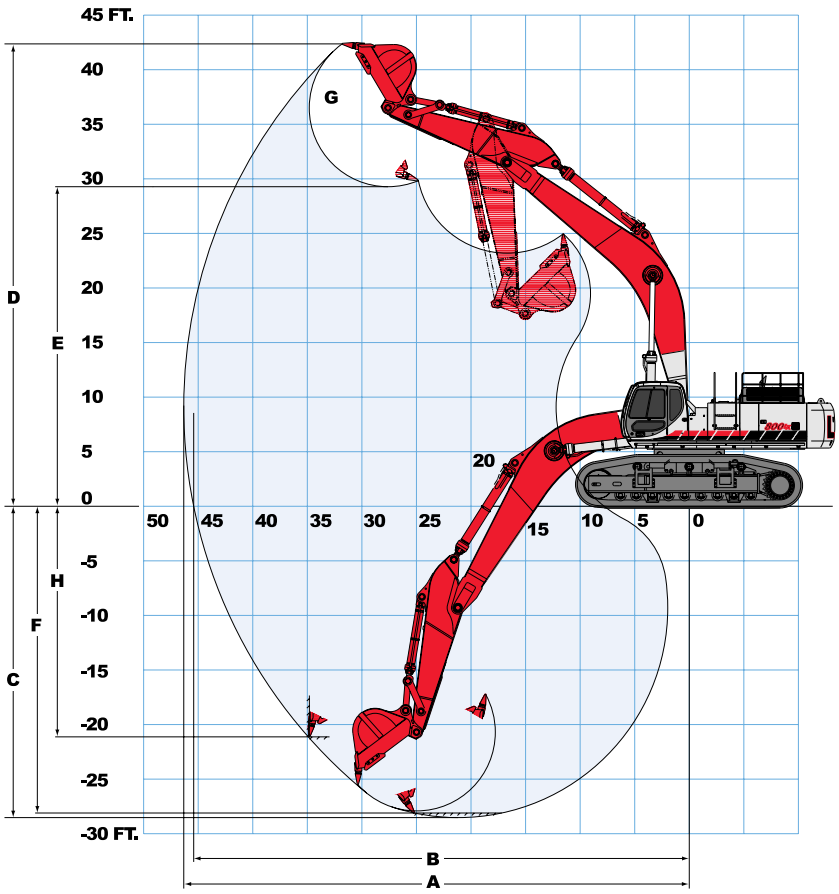

Standard Excavator

Machine equipped with 27' 7" (8.40 m) boom.	12' 0" Arm (3.66 m)	14' 7" (4.44 m)	18' 5" (5.62 m)
A Max. digging radius	46' 4" (14.12 m)	49' 0" (14.94 m)	52' 10" (16.11 m)
B Max. digging radius @ ground level	45' 5" (13.84 m)	48' 2" (14.68 m)	52' 0" (15.86 m)
C Max. digging depth	28' 6" (8.69 m)	31' 1" (9.47 m)	35' 0" (10.66 m)
D Max. digging height	42' 4" (12.91 m)	44' 7" (13.60 m)	46' 11" (14.66 m)
E Max. dumping height	29' 3" (8.92 m)	31' 2" (9.51 m)	33' 4" (10.17 m)
F Digging depth – 8' (2.44 m) level bottom	28' 1" (8.57 m)	30' 9" (9.36 m)	34' 8" (10.56 m)
G Bucket wrist angle	167°	167°	167°
H Max. vertical wall depth	21' 2" (6.44 m)	25' 5" (7.75 m)	29' 11" (9.11 m)

Mass Excavator

Machine equipped with 23' 9" (7.25 m) boom.	9' 9" Arm (2.98 m)
A Max. digging radius	40' 5" (12.31 m)
B Max. digging radius @ ground level	39' 4" (11.99 m)
C Max. digging depth	23' 1" (7.03 m)
D Max. digging height	38' 7" (11.76 m)
E Max. dumping height	25' 11" (7.89 m)
F Digging depth – 8' (2.44 m) level bottom	22' 7" (6.88 m)
G Bucket wrist angle	162°
H Max. vertical wall depth	13' 11" (4.25 m)

Dimensions

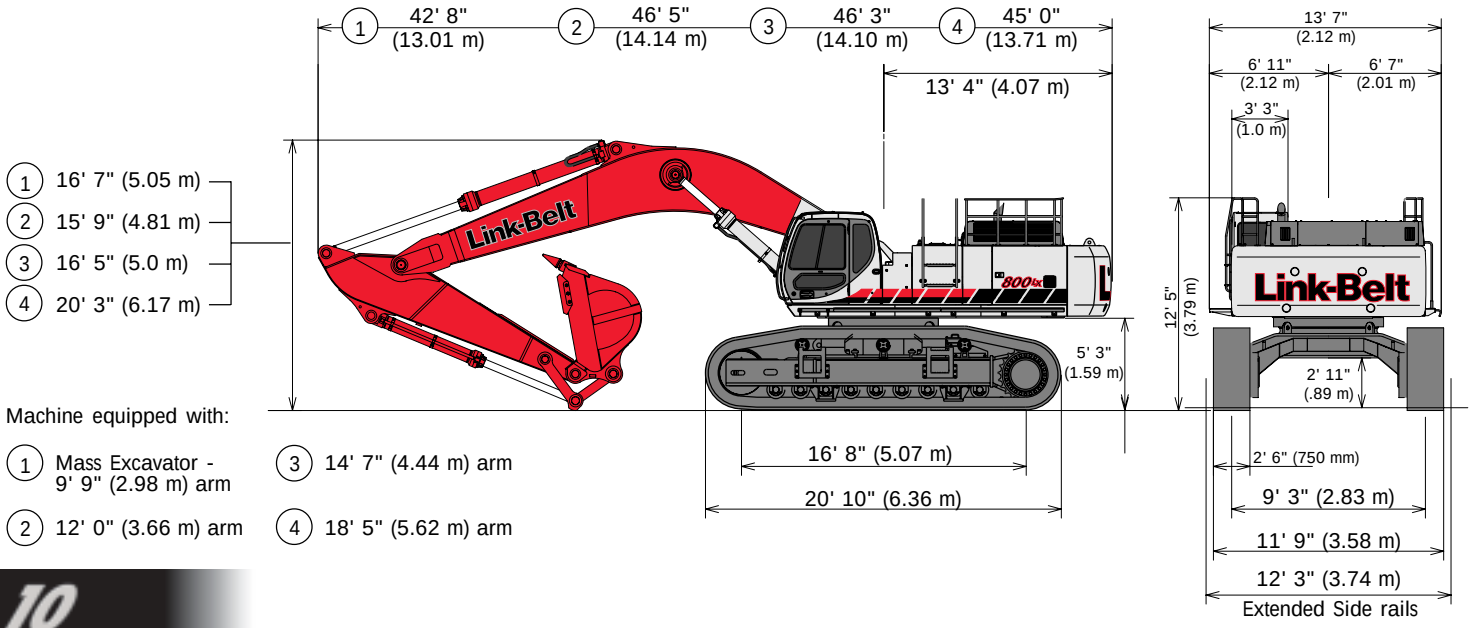

Machine equipped with:

1. Mass Excavator - 9' 9" (2.98 m) arm
2. 12' 0" (3.66 m) arm
3. 14' 7" (4.44 m) arm
4. 18' 5" (5.62 m) arm

Lifting Capacities (Standard Excavator) w/sideframes extended

12' 0" (3.66 m) Arm w/side frames extended

with 27' 7" (8.40 m) Boom
and 6,614 lb. (3 000 kg) Bucket. Auto Power-Up Mode Applied

Bucket Hook Height		Radius of Load													
		10' 0" (3.05 m)		15' 0" (4.57 m)		20' 0" (6.10 m)		25' 0" (7.62 m)		30' 0" (9.14 m)		35' 0" (10.66 m)		Cap. at Max. Reach	
		End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0" (9.14 m)	**lbs.** kg													**16,420*** 7 440*	**16,420*** 7 440*
+25' 0" (7.62 m)	**lbs.** kg									**28,540*** 12 940*	**28,540*** 12 940*	**22,530*** 10 210*	**22,530*** 10 210*	**16,360*** 7 420*	**16,360*** 7 420*
+20' 0" (6.10 m)	**lbs.** kg									**30,570*** 13 860*	**30,570*** 13 860*	**27,850*** 12 630*	**23,200** 10 520	**16,760*** 7 600*	**16,760*** 7 600*
+15' 0" (4.57 m)	**lbs.** kg			**70,910*** 32 160*	**70,910*** 32 160*	**49,460*** 22 430*	**49,460*** 22 430*	**39,130*** 17 740*	**39,130*** 17 740*	**33,110*** 15 010*	**29,170** 13 230	**29,270*** 13 270*	**22,190** 10 060	**17,610*** 7 980*	**17,610*** 7 980*
+10' 0" (3.05 m)	**lbs.** kg					**56,720*** 25 720*	**51,580** 23 390	**43,390*** 19 680*	**36,700** 16 640	**35,700*** 16 190*	**27,460** 12 450	**30,790*** 13 960*	**21,140** 9 580	**18,950*** 8 590*	**16,670** 7 560
+5' 0" (1.52 m)	**lbs.** kg			**36,340*** 16 480*	**36,340*** 16 480*	**61,470*** 27 880*	**48,140** 21 830	**46,710*** 21 180*	**34,430** 15 610	**37,860*** 17 170*	**25,980** 11 780	**32,070*** 14 540*	**20,190** 9 150	**20,970*** 9 510*	**16,280** 7 380
Ground Line	**lbs.** kg			**46,410*** 21 050*	**46,410*** 21 050*	**63,190*** 28 660*	**46,310** 21 000	**48,540*** 22 010*	**32,910** 14 920	**39,170*** 17 760*	**24,890** 11 290	**32,760*** 14 850*	**19,480** 8 830	**23,970*** 10 870*	**16,480** 7 470
-5' 0" (1.52 m)	**lbs.** kg	**40,280*** 18 270*	**40,280*** 18 270*	**60,960*** 27 650*	**60,960*** 27 650*	**62,310*** 28 260*	**45,610** 20 680	**48,630*** 22 050*	**32,120** 14 560	**39,280*** 17 810*	**24,260** 11 000	**32,430*** 14 710*	**19,090** 8 650	**28,600*** 12 970*	**17,380** 7 880
-10' 0" (3.05 m)	**lbs.** kg	**56,710*** 25 720*	**56,710*** 25 720*	**76,290*** 34 600*	**75,780** 34 370	**59,090*** 26 800*	**45,700** 20 720	**46,790*** 21 220*	**31,970** 14 500	**37,780*** 17 130*	**24,130** 10 940			**30,680*** 13 910*	**19,280** 8 740
-15' 0" (4.57 m)	**lbs.** kg	**74,790*** 33 920*	**74,790*** 33 920*	**67,350*** 30 540*	**67,350*** 30 540*	**53,240*** 24 140*	**46,470** 21 070	**42,520*** 19 280*	**32,430** 14 710	**33,810*** 15 330*	**24,580** 11 140			**31,260*** 14 170*	**22,880** 10 370
-20' 0" (6.10 m)	**lbs.** kg			**54,210*** 24 580*	**54,210*** 24 580*	**43,640*** 19 790*	**43,640*** 19 790*	**34,380*** 15 590*	**33,680** 15 270					**30,920*** 14 020*	**30,270** 13 730

14' 7" (4.44 m) Arm w/side frames extended

with 27' 7" (8.40 m) Boom
and 6,614 lb. (3 000 kg) Bucket. Auto Power-Up Mode Applied

Bucket Hook Height		Radius of Load															
		10' 0" (3.05 m)		15' 0" (4.57 m)		20' 0" (6.10 m)		25' 0" (7.62 m)		30' 0" (9.14 m)		35' 0" (10.66 m)		40' 0" (12.19 m)		Cap. at Max. Reach	
		End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+35' 0" (10.66 m)	**lbs.** kg															**10,980*** 4 980*	**10,980*** 4 980*
+30' 0" (9.14 m)	**lbs.** kg											**16,730*** 7 580*	**16,730*** 7 580*			**9,690*** 4 390*	**9,690*** 4 390*
+25' 0" (7.62 m)	**lbs.** kg											**22,150*** 10 040*	**22,150*** 10 040*			**9,480*** 4 300*	**9,480*** 4 300*
+20' 0" (6.10 m)	**lbs.** kg									**27,850*** 12 630*	**27,850*** 12 630*	**25,520*** 11 570*	**23,460** 10 640	**15,440*** 7 000*	**15,440*** 7 000*	**9,550*** 4 330*	**9,550*** 4 330*
+15' 0" (4.57 m)	**lbs.** kg							**35,820*** 16 240*	**35,820*** 16 240*	**30,590*** 13 870*	**29,590** 13 420	**27,160*** 12 310*	**22,340** 10 130	**20,150*** 9 130*	**17,110** 7 760	**9,880*** 4 480*	**9,880*** 4 480*
+10' 0" (3.05 m)	**lbs.** kg			**64,210*** 29 120*	**64,210*** 29 120*	**52,440*** 23 780*	**52,440*** 23 780*	**40,470*** 18 350*	**37,410** 16 960	**33,470*** 15 180*	**27,720** 12 570	**28,940*** 13 120*	**21,150** 9 590	**23,750*** 10 770*	**16,390** 7 430	**10,490*** 4 750*	**10,490*** 4 750*
+5' 0" (1.52 m)	**lbs.** kg			**42,980*** 19 490*	**42,980*** 19 490*	**58,500*** 26 530*	**49,040** 22 240	**44,420*** 20 140*	**34,790** 15 780	**36,030*** 16 340*	**26,030** 11 800	**30,550*** 13 850*	**20,060** 9 090	**25,990*** 11 780*	**15,710** 7 120	**11,430*** 5 180*	**11,430*** 5 180*
Ground Line	**lbs.** kg	**21,790*** 9 880*	**21,790*** 9 880*	**45,120*** 20 460*	**45,120*** 20 460*	**61,750*** 28 000*	**46,450** 21 060	**47,040*** 21 330*	**32,900** 14 920	**37,860*** 17 170*	**24,710** 11 200	**31,680*** 14 360*	**19,170** 8 690	**25,240*** 11 440*	**15,170** 6 880	**12,830*** 5 810*	**12,830*** 5 810*
-5' 0" (1.52 m)	**lbs.** kg	**33,900*** 15 370*	**33,900*** 15 370*	**54,210*** 24 580*	**54,210*** 24 580*	**62,310*** 28 260*	**45,170** 20 480	**48,040*** 21 790*	**31,750** 14 400	**38,640*** 17 520*	**23,850** 10 810	**31,930** 14 480	**18,590** 8 430	**18,450*** 8 360*	**14,890** 6 750	**14,910*** 6 760*	**14,630** 6 630
-10' 0" (3.05 m)	**lbs.** kg	**46,540*** 21 110*	**46,540*** 21 110*	**67,370*** 30 550*	**67,370*** 30 550*	**60,450*** 27 410*	**44,820** 20 330	**47,230*** 21 420*	**31,280** 14 180	**38,020*** 17 240*	**23,460** 10 640	**31,100*** 14 100*	**18,380** 8 330			**18,130*** 8 220*	**15,990** 7 250
-15' 0" (4.57 m)	**lbs.** kg	**60,780*** 27 560*	**60,780*** 27 560*	**73,090*** 33 150*	**73,090*** 33 150*	**56,090*** 25 440*	**45,220** 20 510	**44,290*** 20 080*	**31,420** 14 250	**35,490*** 16 090*	**23,580** 10 690	**27,380*** 12 410*	**18,680** 8 470			**23,580*** 10 690*	**18,460** 8 370
-20' 0" (6.10 m)	**lbs.** kg	**77,890*** 35 330*	**77,890*** 35 330*	**62,060*** 28 150*	**62,060*** 28 150*	**48,560*** 22 020*	**46,350** 21 020	**38,380*** 17 400*	**32,240** 14 620	**29,680*** 13 460*	**24,400** 11 060					**27,470*** 12 460*	**23,040** 10 450
-25' 0" (7.62 m)	**lbs.** kg			**45,460*** 20 620*	**45,460*** 20 620*	**35,960*** 16 310*	**35,960*** 16 310*	**26,870*** 12 180*	**26,870*** 12 180*							**25,810*** 11 700*	**25,810*** 11 700*

Specifications (continued)

Lifting Capacities (Standard Excavator) w/sideframes extended (cont.)

18' 5" (5.62 m) Arm w/side frames extended
with 27' 7" (8.40 m) Boom and 5,710 lb. (2 590 kg) Bucket.
Auto Power-Up Mode Applied

Bucket Hook Height		Radius of Load																	
		10' 0" (3.05 m)		15' 0" (4.57 m)		20' 0" (6.10 m)		25' 0" (7.62 m)		30' 0" (9.14 m)		35' 0" (10.66 m)		40' 0" (12.19 m)		45' 0" (13.71 m)		Cap. at Max. Reach	
		End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+35' 0" (10.66 m)	**lbs.**																	**11,800***	**11,800***
	kg																	5 350*	5 350*
+30' 0" (9.14 m)	**lbs.**											**18,650***	**18,650***					**10,800***	**10,800***
	kg											8 450*	8 450*					4 890*	4 890*
+25' 0" (7.62 m)	**lbs.**											**22,350***	**22,350***	**12,000***	**12,000***			**10,200***	**10,200***
	kg											10 130*	10 130*	5 440*	5 440*			4 620*	4 620*
+20' 0" (6.10 m)	**lbs.**											**23,450***	**22,050**	**17,550***	**16,700***			**9,950***	**9,950***
	kg											10 630*	10 000	7 960*	7 570*			4 510*	4 510*
+15' 0" (4.57 m)	**lbs.**							**32,600***	**32,600***	**28,000***	**27,700**	**25,000***	**20,750**	**21,400***	**15,850**			**10,050***	**10,050***
	kg							14 780*	14 780*	12 700*	12 560	11 330*	9 410	9 700*	7 180			4 550*	4 550*
+10' 0" (3.05 m)	**lbs.**			**72,400***	**72,400***	**48,900***	**48,900***	**37,500***	**35,250**	**30,950***	**25,800**	**26,800***	**19,500**	**24,050***	**15,050**			**10,350***	**10,350***
	kg			32 840*	32 840*	22 180*	22 180*	17 000*	15 980	14 030*	11 700	12 150*	8 840	10 900*	6 820			4 690*	4 690*
+5' 0" (1.52 m)	**lbs.**			**48,250***	**48,250***	**55,750***	**47,100**	**41,800***	**32,750**	**33,650***	**24,150**	**28,500***	**18,350**	**24,950***	**14,250**			**11,050***	**11,050***
	kg			21 880*	21 880*	25 280*	21 360	18 960*	14 850	15 260*	10 950	12 920*	8 320	11 310*	6 460			5 010*	5 010*
Ground Line	**lbs.**			**48,200***	**48,200***	**59,700***	**44,700**	**44,800***	**30,950**	**35,700***	**22,850**	**29,750***	**17,450**	**24,550**	**13,650**			**12,200***	**12,200***
	kg			21 860*	21 860*	27 070*	20 270	20 320*	14 030	16 190*	10 360	13 490*	7 910	11 130	6 190			5 530*	5 530*
-5' 0" (1.52 m)	**lbs.**			**57,050***	**57,050***	**60,750***	**43,400**	**46,150***	**29,800**	**36,700***	**21,950**	**30,050**	**16,800**	**22,550***	**13,300**			**13,950***	**12,700**
	kg			25 870*	25 870*	27 550*	19 680	20 930*	13 510	16 640*	9 950	13 630	7 620	10 220*	6 030			6 320*	5 760
-10' 0" (3.05 m)	**lbs.**			**70,900***	**70,900***	**59,250***	**42,900**	**45,600***	**29,250**	**36,300***	**21,500**	**29,500***	**16,550**					**16,750***	**13,850**
	kg			32 160*	32 160*	26 870*	19 450	20 680*	13 260	16 460*	9 750	13 380*	7 500					7 590*	6 280
-15' 0" (4.57 m)	**lbs.**	**62,850***	**62,850***	**73,250***	**73,150**	**55,100***	**43,050**	**42,900***	**29,250**	**34,050***	**21,500**	**26,800***	**16,750**					**21,550***	**15,950**
	kg	28 500*	28 500*	33 220*	33 180	24 990*	19 520	19 450*	13 260	15 440*	9 750	12 150*	7 590					9 770*	7 230
-20' 0" (6.10 m)	**lbs.**	**82,000***	**82,000***	**62,300***	**62,300***	**47,850***	**43,750**	**37,350***	**29,800**	**28,750***	**22,100**							**25,100***	**19,900**
	kg	37 190*	37 190*	28 250*	28 250*	21 700*	19 840	16 940*	13 510	13 040*	10 020							11 380*	9 020
-25' 0" (7.62 m)	**lbs.**			**45,950***	**45,950 ***	**35,750***	**35,750***	**26,700***	**26,700***									**23,550***	**23,550***
	kg			20 840*	20 840*	16 210*	16 210*	12 110*	12 110*									10 680*	10 680*

Lifting Capacities (Mass Excavator) w/side frames extended

9' 9" (2.98 m) Arm
with 23' 9" (7.25 m) Boom and 7,625 lb. (3 458 kg) Bucket.
Auto Power-Up Mode Applied

Bucket Hook Height		Radius of Load											
		10' 0" (3.05 m)		15' 0" (4.57 m)		20' 0" (6.10 m)		25' 0" (7.62 m)		30' 0" (9.14 m)		Cap. at Max. Reach	
		End	Side	End	Side	End	Side	End	Side	End	Side	End	Side
+30' 0" (9.14 m)	**lbs.**											**26,500***	**26,500***
	kg											12 020*	12 020*
+25' 0" (7.62 m)	**lbs.**											**26,200***	**26,200***
	kg											11 880*	11 880*
+20' 0" (6.10 m)	**lbs.**							**38,730***	**38,730***	**34,920***	**30,420**	**26,900***	**26,900***
	kg							17 560*	17 560*	15 830*	13 790	12 200*	12 200*
+15' 0" (4.57 m)	**lbs.**			**70,980***	**70,980***	**52,030***	**52,030***	**42,420***	**39,980**	**36,730***	**29,150**	**28,510***	**24,110**
	kg			32 190*	32 190*	23 600*	23 600*	19 240*	18 130	16 660*	13 220	12 930*	10 930
+10' 0" (3.05 m)	**lbs.**			**84,560***	**84,560***	**58,950***	**53,500**	**46,210***	**37,520**	**38,720***	**27,760**	**31,200***	**22,570**
	kg			38 350*	38 350*	26 730*	24 260	20 960*	17 010	17 560*	12 590	14 150*	10 230
+5' 0" (1.52 m)	**lbs.**			**68,440***	**68,440***	**63,610***	**50,140**	**49,100***	**35,470**	**40,250***	**26,540**	**35,430***	**22,080**
	kg			31 040*	31 040*	28 850*	22 740	22 270*	16 080	18 250*	12 030	16 070*	10 010
Ground Line	**lbs.**			**77,680***	**77,680***	**64,970***	**48,260**	**50,270***	**34,120**	**40,620***	**25,700**	**36,740***	**22,660**
	kg			35 230*	35 230*	29 470*	21 890	22 800*	15 470	18 420*	11 650	16 660*	10 270
-5' 0" (1.52 m)	**lbs.**	**59,110***	**59,110***	**83,320***	**78,050**	**62,930***	**47,610**	**49,070***	**33,520**	**38,970***	**25,400**	**37,790***	**24,620**
	kg	26 810*	26 810*	37 790*	35 400	28 540*	21 590	22 250*	15 200	17 670*	11 520	17 140*	11 160
-10' 0" (3.05 m)	**lbs.**	**84,380***	**84,380***	**73,900***	**73,900***	**57,200***	**47,950**	**44,590***	**33,730**			**38,550***	**28,900**
	kg	38 270*	38 270*	33 520*	33 520*	25 940*	21 740	20 220*	15 290			17 480*	13 100
-15' 0" (4.57 m)	**lbs.**			**58,970***	**58,970***	**46,220***	**46,220***					**38,060***	**38,060***
	kg			26 740*	26 740*	20 960*	20 960*					17 260*	17 260*

Notes: Excavator lifting capacities

1. Lifting capacities shown should not be exceeded. Weight of all lifting accessories must be deducted from the above lifting capacities.
2. Lifting capacities are based on machine standing on firm, uniform supporting surface. User must make allowances for job conditions such as soft or uneven ground.
3. Lifting capacities shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Capacities marked with an asterisk (*) are limited by hydraulic capacities.
4. Least stable position is over the side.
5. Operator should be fully acquainted with the Operator's Manual & Operating Safety Booklet, furnished by LBX before operating the machine.
6. Capacities apply only to the machine as originally manufactured and normally equipped by LBX Company, LLC.
7. Lift capacity ratings are based on SAE J/ISO 10567, "Earthmoving Machinery – Hydraulic Excavators – Lift Capacity".
8. Lifting or digging operations with the side frames in the retracted positions are not permitted.

Bucket Sizes - Standard Excavator

Bucket Type	Capacity	Width Outside Lip	Weight	# Teeth	Arm 12' 0" (3.66 m)	Arm 14' 7" (4.44 m)	Arm 18' 5" (5.62 m)
	2.53 cu. yd. (1.93 m³)	42" (1 067 mm)	6,403 lb. (2 904 kg)	4	H	H	M
	3.00 cu. yd. (2.29 m³)	48" (1 219 mm)	6,803 lb. (3 086 kg)	4	H	H	M
ESCO	3.48 cu. yd. (2.66 m³)	54" (1 372 mm)	7,203 lb. (3 267 kg)	4	H	M	L
HDP	3.96 cu. yd. (3.03 m³)	60" (1 524 mm)	7,780 lb. (3 529 kg)	5	M	L	N/A
	4.45 cu. yd. (3.40 m³)	66" (1 676 mm)	8,180 lb. (3 710 kg)	5	M	L	N/A
	4.94 cu. yd. (3.78 m³)	72" (1 829 mm)	8,580 lb. (3 892 kg)	5	L	N/A	N/A
	5.42 cu. yd. (4.14 m³)	78" (1 981 mm)	9,157 lb. (4 154 kg)	6	L	N/A	N/A
	5.91 cu. yd. (4.52 m³)	84" (2 134 mm)	9,557 lb. (4 335 kg)	6	N/A	N/A	N/A
	2.47 cu. yd. (1.89 m³)	45" (1 143 mm)	6,470 lb. (2 935 kg)	4	H	H	H
ESCO	3.26 cu. yd. (2.49 m³)	56" (1 422 mm)	7,211 lb. (3 271 kg)	4	H	M	L
XDP	3.99 cu. yd. (3.05 m³)	66" (1 676 mm)	8,061 lb. (3 656 kg)	5	M	L	N/A
	4.43 cu. yd. (3.39 m³)	72" (1 829 mm)	8,466 lb. (3 840 kg)	5	L	L	N/A
	5.30 cu. yd. (4.05 m³)	84" (2 134 mm)	9,451 lb. (4 287 kg)	6	L	N/A	N/A

Approval Code For Arm / Bucket Combinations

H ..... Heavy material (up to 3,370 lbs. / cu. yd.)

M ..... Medium material (up to 2,700 lbs. / cu. yd.)

L ..... Light material (up to 2,020 lbs. / cu. yd.)

N / A ... Not applicable

Bucket Sizes - Mass Excavator

Bucket Type	Capacity	Width Outside Lip	Weight	# Teeth	Arm 9' 9" (2.98m)
	2.53 cu. yd. (1.93 m³)	42" (1 067 mm)	6,403 lb. (2 904 kg)	4	H
	3.00 cu. yd. (2.29 m³)	48" (1 219 mm)	6,803 lb. (3 086 kg)	4	H
ESCO	3.48 cu. yd. (2.66 m³)	54" (1 372 mm)	7,203 lb. (3 267 kg)	4	H
HDP	3.96 cu. yd. (3.03 m³)	60" (1 524 mm)	7,780 lb. (3 529 kg)	5	H
	4.45 cu. yd. (3.40 m³)	66" (1 676 mm)	8,180 lb. (3 710 kg)	5	H
	4.94 cu. yd. (3.78 m³)	72" (1 829 mm)	8,580 lb. (3 892 kg)	5	H
	5.42 cu. yd. (4.14 m³)	78" (1 981 mm)	9,157 lb. (4 154 kg)	6	M
	5.91 cu. yd. (4.52 m³)	84" (2 134 mm)	9,557 lb. (4 335 kg)	6	M
	2.47 cu. yd. (1.89 m³)	45" (1 143 mm)	6,470 lb. (2 935 kg)	4	H
ESCO	3.26 cu. yd. (2.49 m³)	56" (1 422 mm)	7,211 lb. (3 271 kg)	4	H
XDP	3.99 cu. yd. (3.05 m³)	66" (1 676 mm)	8,061 lb. (3 656 kg)	5	H
	4.43 cu. yd. (3.39 m³)	72" (1 829 mm)	8,466 lb. (3 840 kg)	5	H
	5.30 cu. yd. (4.05 m³)	84" (2 134 mm)	9,451 lb. (4 287 kg)	6	M

Approval Code For Arm / Bucket Combinations

H ..... Heavy material (up to 3,370 lbs. / cu. yd.)

M ..... Medium material (up to 2,700 lbs. / cu. yd.)

L ..... Light material (up to 2,020 lbs. / cu. yd.)

N / A ... Not applicable

Transportation Specifications

Upper Structure w/TTB and Lower Cross Frame

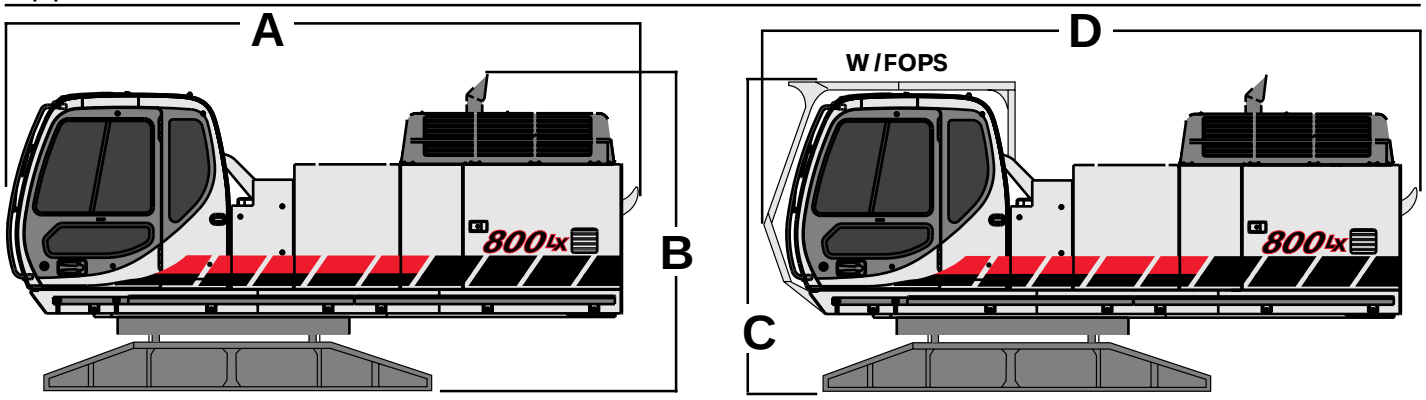

Weight: 51,370 lbs. (23 300 kg)
Weight: W/FOPS 52,250 lbs. (23 700 kg)

Dimension A: 17' 6" (5.34 m)
Dimension B: 9' 1" (2.77 m)
Dimension C: 9' 1" (2.78 m)
Dimension D: 18' 1" (5.50 m)

FOPS Head Guard:
(Optional)
Weight: 705 lbs. (320 kg).

Counter Weight

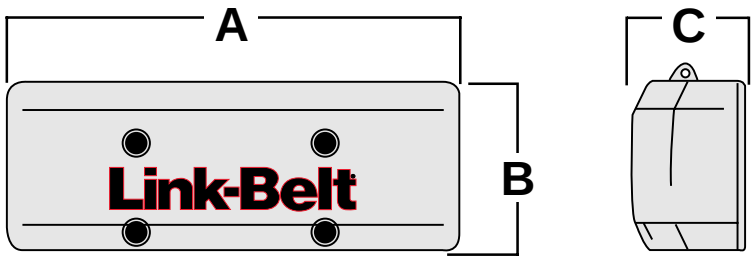

Weight: 27,557 lbs. (12 500 kg)
Dimension A: 11' 5" (3.47 m)
Dimension B: 4' 7" (1.39 m)
Dimension C: 2' 8" (.82 m)

Hand Rails

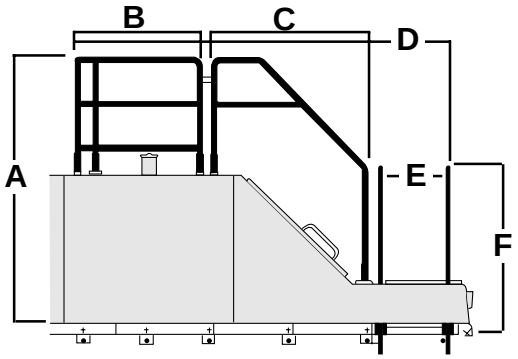

Right Side

Total Weight: 165 lbs. (75 kg)

Dimension A: 6' 3" (1.91 m)
Dimension B: 3' 1" (.94 m)
Dimension C: 3' 9" (1.15 m)
Dimension D: 8' 10" (2.70 m)
Dimension E: 2' 0" (.60 m)
Dimension F: 4' 5" (1.35 m)
Dimension G: 2' 4" (.71 m)
Dimension H: 5' 10" (1.77 m)
Dimension I: 2' 9" (.85 m)

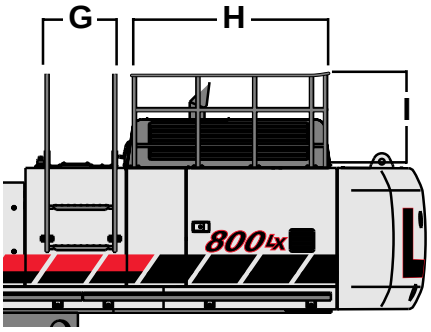

Cab Side

Undercarriage

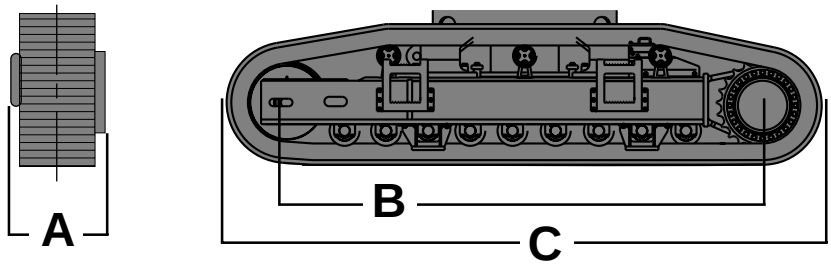

Side Frame with Steps:

Shoe Width:	Weight: (per side)
29.5" (750 mm)	29,321 lbs. (13 300 kg)
35.4" (900 mm)	30,864 lbs. (14 000 kg)
43.3" (1100 mm)	32,628 lbs. (14 800 kg)

Dimension A:
W/ 29.5" (750 mm) shoes - 39.7" (1 010 mm)
W/ 35.4" (900 mm) shoes - 39.7" (1 010 mm)
W/ 43.3" (1 100 mm) shoes - 43.3" (1 100 mm)
Dimension B: 16' 7"(5070 mm)
Dimension C: 20' 10" (6360 mm)

Transportation Specifications (cont.)

Catwalk

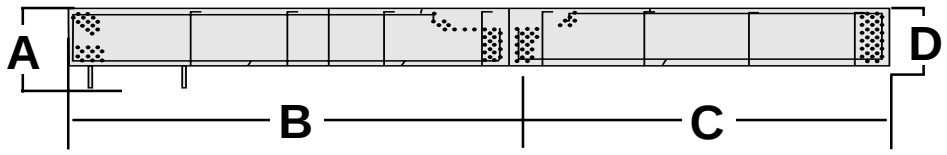

Weight:
Left Front: 82 lbs. (37 kg)
Left Rear: 73 lbs. (33 kg)

Dimension A: 1' 8" (.52 m)
Dimension B: 8' 4" (2.55 m)
Dimension C: 7' 3" (2.20 m)
Dimension D: 1' 6" (.45 m)

Boom with Arm Cylinder and Piping

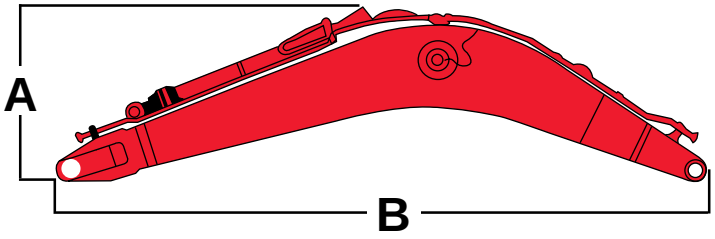

BOOM	A	B	WIDTH	WEIGHT
Excavator	7' 6" (2.28 m)	28' 8" (8.73 m)	4' 11" (1.49 m)	17,725 lbs. (8 040 kg)
Mass	8' 6" (2.59 m)	24' 10" (7.58 m)	4' 11" (1.49 m)	16,578 lbs. (7 520 kg)

Arm with Bucket Cylinder and Linkage

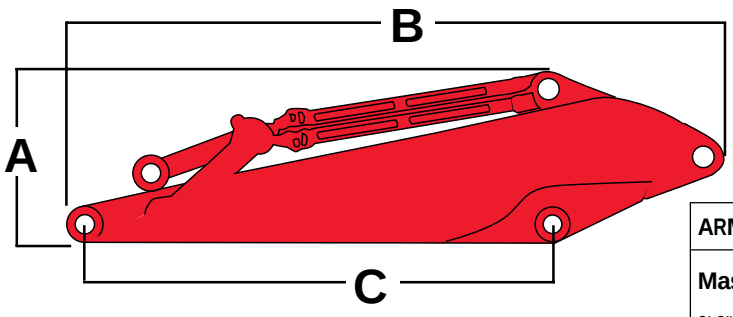

ARM	A	B	C	WIDTH	WEIGHT
Mass 9' 9" (2.98 m) arm	4' 9" (1.44 m)	14' 5" (4.40 m)	9' 9" (2.98 m)	2' 5" (.745 m)	8,642 lbs. (3 920 kg)
Standard 12' 0" (3.66 m) arm	4' 5" (1.35 m)	17' 1" (5.20 m)	12' 0" (3.66 m)	2' 5" (.745 m)	8,223 lbs. (3 730 kg)
Standard 14' 7" (4.44 m) arm	4' 3" (1.29 m)	19' 5" (5.91 m)	14' 7" (4.44 m)	2' 5" (.745 m)	8,994 lbs. (4 080 kg)
Standard 18' 5" (5.62 m) arm	4' 2" (1.28 m)	23' 2" (7.06 m)	18' 5" (5.62 m)	2' 5" (.745 m)	10,119 lbs. (4 590 kg)

Boom Cylinder

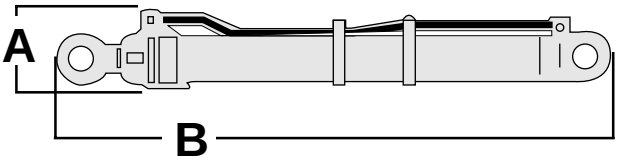

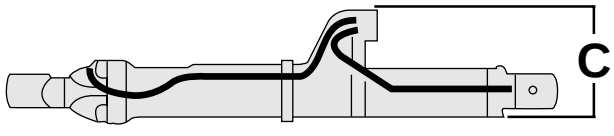

Boom Cylinder: Weight: 1,763 lbs. (800 kg)

Dimension A: 1' 3" (.40 m)
Dimension B: 9' 7" (2.93 m)
Dimension C: 1' 11" (.59 m)

Specifications (continued)

Standard Equipment

- Inte-LX™ Computer System
- Self-diagnostic system
- Five selectable working modes
- One-touch decelerator
- Auto idling system
- Auto idle start
- Low idle up
- Auto engine warm up
- Auto power-up mode
- Integral cylinder cushioning
- Cushioned attachment control
- Boom and arm holding valves
- Free swing control
- Auto power swing
- Travel alarm
- Nephron® filtration system
- Low noise / low vibration cab floating on 6 fluid filled mounts
- Sliding / reclining, suspension cloth upholstered seat with adjustable arm rests and lumbar support, retracting seat belt
- 3-position tilting consoles
- 4th position on left console for entering and exiting the cab also serves as control lock-out
- Illuminated LCD service monitor
- Climate control heater and air conditioner
- Hand grab rails both sides
- Rear view mirrors, coat hook, storage compartment
- Horn, interior lighting, AM / FM STEREO radio, digital clock, floor mat, cigarette lighter
- Safety glass front windows with automatic lock and intermittent rise-up windshield wiper and washer, large LEXAN® rear / side windows
- Gate lock and gate lock lever (control lock-out device)
- Vandalism locks / guarding
- Common key for cab & house doors, engine hood, tool box, and fuel cap
- Upper and lower undercovers
- LC undercarriage
- Easy Maintenance System (EMS)
  Chrome pins and oil impregnated bushings at all attachment locations
- 29.5" (750 mm) 2-Bar Grouser shoes
- 27,560 lbs. (12 500 kg) counterweight

Options

- Counterweight removal system (hydraulically controlled)
- Boom options
  27' 7" (8.40 m) Standard Excavator
  23' 9" (7.25 m) Mass Excavator
- Arms
  9' 9" (2.98 m) (Mass Excavator only)
  12' 0" (3.66 m)
  14' 7" (4.44 m)
  18' 5" (5.62 m)
- Track
  35.5" (900 mm) 2-Bar Grouser Shoes
  43.3" (1100 mm) 2-Bar Grouser Shoes
- Auxiliary Hydraulics
  Single Acting
  Multi-Function
  Thumb
- Hose Burst Check Valves
- Couplers (field install)
  Hendrix Hydraulic Coupler
  Esco Multi-Pin Grabber
- Thumbs (field install)
  Esco Universal rigid
  Esco Hydraulic non-link
  Esco Hydraulic non-link (for coupler)
  Esco Hydraulic link

LBX Company LLC Lexington, Kentucky

Litho in USA 6/02 #LBX2074 (Supersedes #LBX2057)

® LBX and ® Link-Belt are registered trademarks. Copyright 2002. All rights reserved. We are constantly improving our products and therefore reserve the right to change designs and specifications.